



# MS12180 (12V18Ah)



RT 12180 is a general purpose battery with 5 years floating design life, meet with IEC, JIS standard. With heavy duty grid, thickness plates, special additives, RT series battery have long and reliable standby service life.

## Specification

<b>Cells Per Unit</b>	6
<b>Voltage Per Unit</b>	12
<b>Capacity</b>	18Ah@20hr-rate to 1.75V per cell @25°C
<b>Weight</b>	Approx. 5.0 Kg
<b>Max. Discharge Current</b>	180 A (5 sec)
<b>Internal Resistance</b>	Approx. 14 mΩ
<b>Operating Temperature Range</b>	Discharge: -20°C~60°C Charge: 0°C~50°C Storage: -20°C~60°C
<b>Normal Operating Temperature Range</b>	25°C±5°C
<b>Float charging Voltage</b>	13.7 to 13.9 VDC/unit Average at 25°C
<b>Recommended Maximum Charging Current Limit</b>	5.4 A
<b>Equalization and Cycle Service</b>	14.6 to 14.8 VDC/unit Average at 25°C
<b>Self Discharge</b>	RITAR Valve Regulated Lead Acid (VRLA) batteries can be stored for more than 6 months at 25°C. Self-discharge ratio less than 3% per month at 25°C. Please charge batteries before using.
<b>Terminal</b>	Faston F3/F13
<b>Constainer Material</b>	A.B.S. (UL94-HB), Flammability resistance of UL94-V2 can be available upon request.



MH28539



G4M20206-0910-E-16






ISO9001:2000 Certificate

## Dimensions

Unit: mm Dimension: 181(L)×77(W)×167(H)

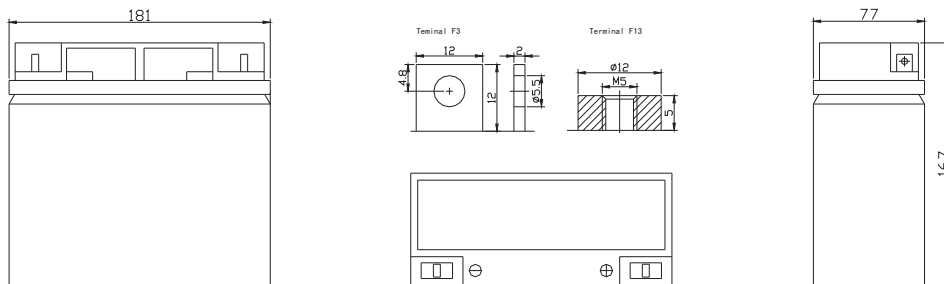

### Constant Current Discharge Characteristics : A(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	73.19	47.99	37.61	21.11	12.55	7.226	4.910	3.929	3.263	2.078	1.799	1.010
10.0V	70.55	46.79	36.41	20.84	12.20	7.080	4.820	3.875	3.208	2.070	1.781	0.973
10.2V	66.40	44.47	35.40	20.53	12.09	7.005	4.777	3.837	3.173	2.051	1.754	0.955
10.5V	59.69	41.58	33.39	19.96	11.85	6.914	4.734	3.800	3.135	2.033	1.745	0.927
10.8V	53.48	38.78	31.50	19.30	11.64	6.857	4.679	3.781	3.102	2.025	1.716	0.873
11.1V	46.79	35.55	29.06	18.57	11.32	6.581	4.587	3.748	3.070	2.009	1.689	0.858

### Constant Power Discharge Characteristics : W(25°C)

F.V/Time	5MIN	10MIN	15MIN	30MIN	1HR	2HR	3HR	4HR	5HR	8HR	10HR	20HR
9.60V	770.0	510.4	402.7	241.7	145.7	84.30	57.40	46.50	38.63	24.89	21.56	12.10
10.0V	749.9	499.8	396.9	239.2	143.5	83.58	57.28	46.39	38.43	24.79	21.35	11.67
10.2V	713.3	480.0	391.7	237.1	142.5	83.05	57.07	46.01	38.06	24.60	21.15	11.46
10.5V	651.0	460.2	371.3	232.3	140.6	82.38	56.83	45.59	37.61	24.40	20.93	11.13
10.8V	587.4	430.5	350.8	226.8	138.3	81.70	56.17	45.42	37.22	24.29	20.61	10.49
11.1V	518.0	400.8	330.4	220.6	135.7	78.88	55.07	44.96	36.86	24.12	20.31	10.32


All mentioned values are average values.

# MS12180


12V18Ah



Effect of temperature on long term float life

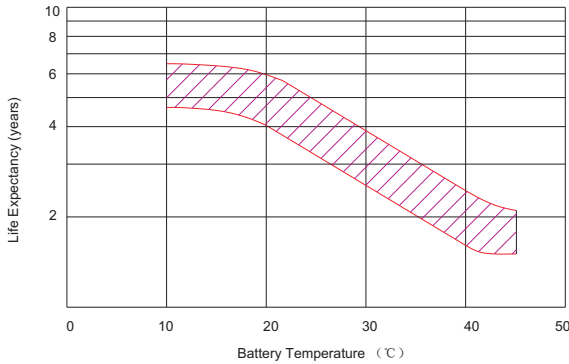

Storage characteristic

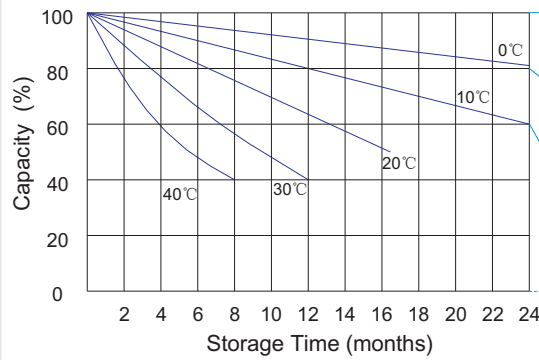


Supplementary charge required (Carry out supplementary charge before use if 100% capacity is requires)

Supplementary charge required before use. This supplementary charge will help to recover the capacity and should be made as early as possible.


Supplementary charge may often fail to recover the capacity. The battery should never be left standing till this state is reached

Supplementary charge and storage guidelines

Charge characteristic Curve for standby use

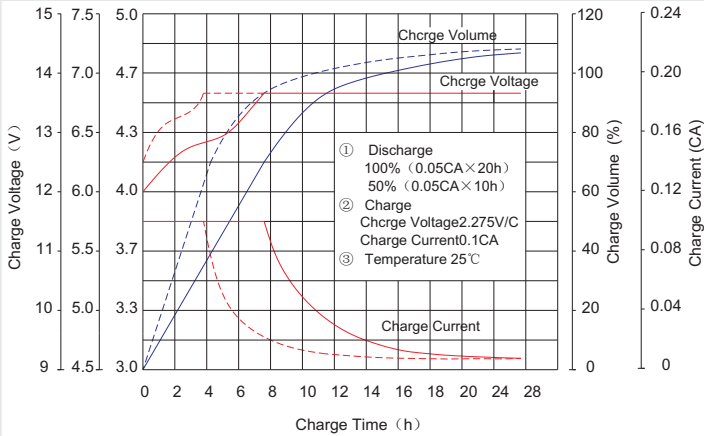

Discharge characteristic Curve

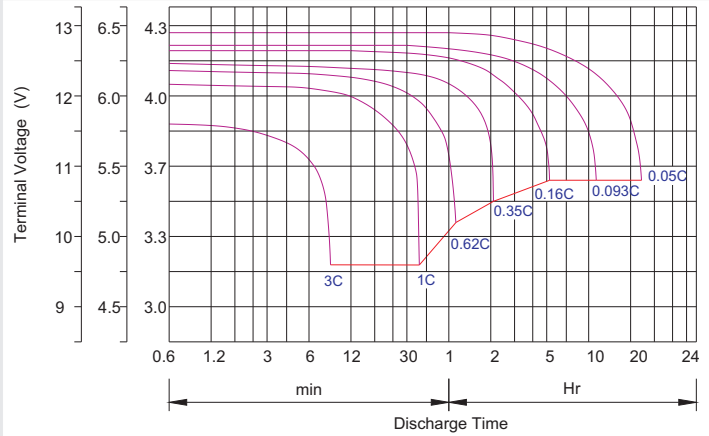

## Capacity Factors With Different Temperature

Battery Type		-20°C	-10°C	0°C	5°C	10°C	20°C	25°C	30°C	40°C	45°C
GEL Battery	6V&12V	50%	70%	83%	85%	90%	98%	100%	102%	104%	105%
	2V	60%	75%	85%	88%	92%	99%	100%	103%	105%	106%
AGM Battery	6V&12V	46%	66%	76%	83%	90%	98%	100%	103%	107%	109%
	2V	55%	70%	80%	85%	92%	99%	100%	104%	108%	110%

## Discharge Current VS. Discharge Voltage

Final Discharge Voltage V/cell	1.75V	1.70V	1.60V
Discharge Current (A)	(A) ≤ 0.2C	0.2C < (A) < 1.0C	(A) ≥ 1.0C

## Maintenance & Cautions

### Float Service:

- ※ Every month, recommend inspection every battery voltage.
- ※ Every three months, recommend equalization charge for one time.

### Equalization charge method:

Discharge: 100% rate capacity discharge.

Charge: Max. current 0.3CA, constant voltage 2.4-2.45V/Cell charge 24h.

- ※ Effect of temperature on float charge voltage:  $-3mV/°C/Cell$ .
- ※ Length of service life will be directly affected by the number of discharge cycles, depth of discharge, ambient temperature and charging voltage.

**Charge the batteries at least once every six months, if they are stored at 25°C.**

### Charging Method:

Constant Voltage	-0.2Cx2h+2.4~2.45V/Cellx24h, Max. Current 0.3CA
Constant Current	-0.2Cx2h+0.1CAx12h
Fast	-0.2Cx2h+0.3CAx4.0h