

OPzV2-200(2V200Ah)

OPzV series is Valve Regulated Lead Acid battery that adopts immobilized GEL and Tubular Plate technology to offer high reliability and performance. The Battery is designed and manufactured according to DIN standards and with die-casting positive grid and patented formula of active material OPzV series exceeds DIN standard values with more than 20 years floating design life at 25 °C. It is the best solution for cyclic use under extreme operating conditions.




Specification

Cells Per Unit	1
Voltage Per Unit	2
Nominal Capacity	200Ah@10hr-rate to 1.80V per cell @25°C
Weight	Approx. 16.0Kg (Tolerance ± 3.0%)
Internal Resistance	Approx. 1.0 mΩ
Terminal	F10(M8)
Max. Discharge Current	1000A (5 sec)
Design Life	25 years
Max. Charging Current	40.0 A
Reference Capacity	C3 153.6AH C5 173.7AH C10 200.0AH C20 213.2AH
Float Charging Voltage	2.25 V~2.30 V @ 25°C Temperature Compensation: -3mV/°C/Cell
Cycle Use Voltage	2.37 V~2.40 V @ 25°C Temperature Compensation: -4mV/°C/Cell
Operating Temperature Range	Discharge: -40°C~60°C Charge: -20°C~50°C Storage: -40°C~60°C
Normal Operating Temperature Range	25°C ± 5°C
Self Discharge	Valve Regulated Lead Acid (VRLA) batteries can be stored for up to 6 months at 25°C and then recharging is recommended. Monthly Self-discharge ratio is less than 2% at 20°C. Please charged batteries before using.
Container Material	A.B.S. UL94-HB, UL94-V0 Optional.

Dimensions

Unit: mm

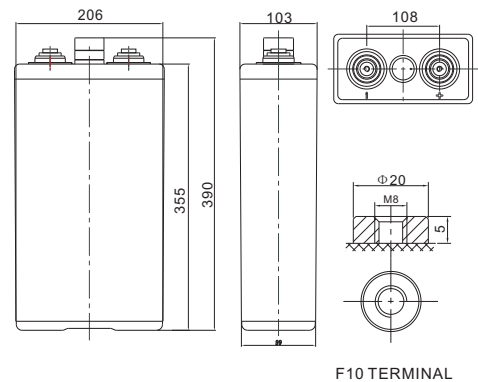

Length	103±2mm (4.06 inches)
Width	206±2mm (8.11 inches)
Height	355±2mm (14.0 inches)
Total Height	390±2mm (15.4 inches)
Torque Value	10~12 N*m

Constant Current Discharge Characteristics :A(25°C)

F.V/ Time	10min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	314.6	251.8	171.3	113.2	72.21	53.77	36.12	24.95	20.90	10.97
1.65V	300.5	242.7	167.3	111.5	71.11	53.17	35.82	24.75	20.70	10.87
1.70V	280.4	230.7	161.3	108.6	69.92	52.18	35.22	24.45	20.60	10.82
1.75V	249.2	210.6	152.3	104.1	68.23	51.19	34.73	24.15	20.30	10.66
1.80V	211.1	188.6	142.3	100.1	65.94	50.10	34.03	23.75	20.00	10.50
1.85V	171.9	155.5	122.2	89.31	60.16	46.03	31.54	22.16	18.70	9.818


Constant Power Discharge Characteristics : WPC(25°C)

F.V/ Time	10min	15min	30min	1h	2h	3h	5h	8h	10h	20h
1.60V	534.7	440.3	311.6	212.2	137.0	102.9	69.95	48.90	41.30	21.68
1.65V	521.6	431.3	307.6	209.9	135.9	102.3	69.45	48.70	41.00	21.53
1.70V	494.5	414.2	298.6	205.9	133.6	100.6	68.85	48.20	40.70	21.37
1.75V	448.2	385.2	284.6	199.1	130.7	98.90	67.76	47.70	40.30	21.16
1.80V	385.9	349.0	269.5	192.8	127.9	97.22	66.57	47.01	39.70	20.84
1.85V	319.6	292.9	233.5	172.3	116.9	89.78	61.99	44.01	37.30	19.58


(Note) The above characteristics data are average values obtained within three charge/discharge cycle not the minimum values.

The battery must be fully charged before the capacity test. The C₁₀ should reach 95% after the first cycle and 100% after the third cycle.


Discharge Characteristics Curve

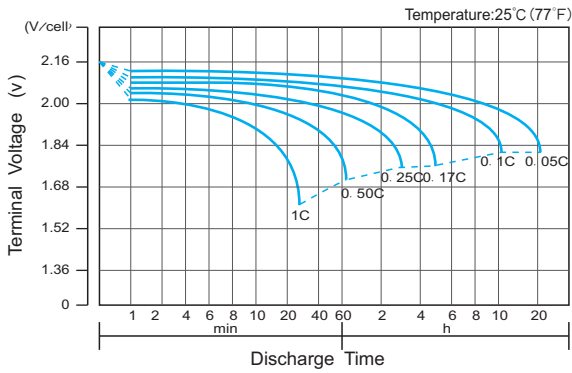


Charge Characteristic Curve for Cycle Use(IUU)

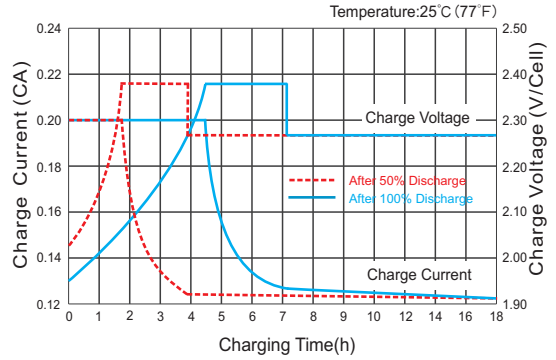


Cycle Life in Relation to Depth of Discharge

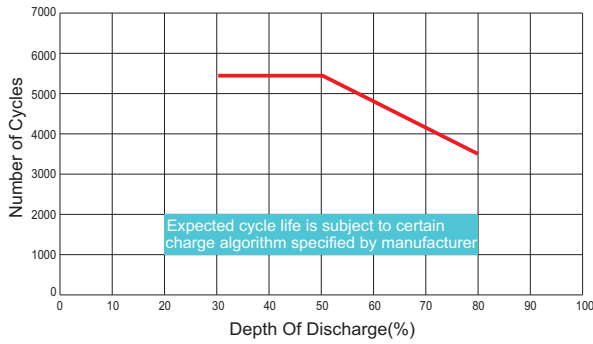


Relationship Between Charging Voltage and Temperature

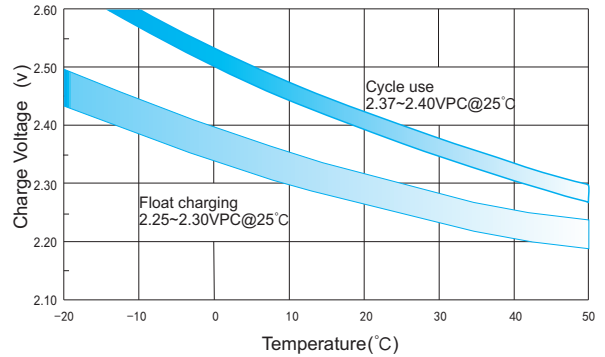


Temperature Effects on Capacity

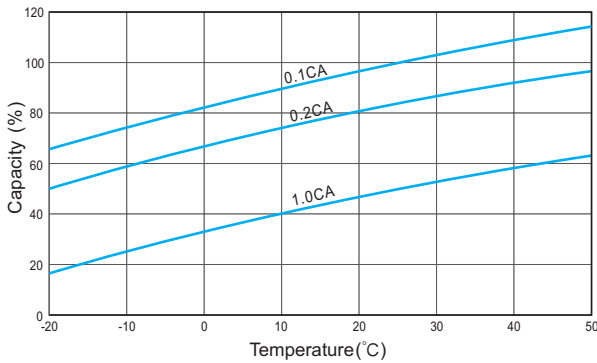

Storage Characteristics

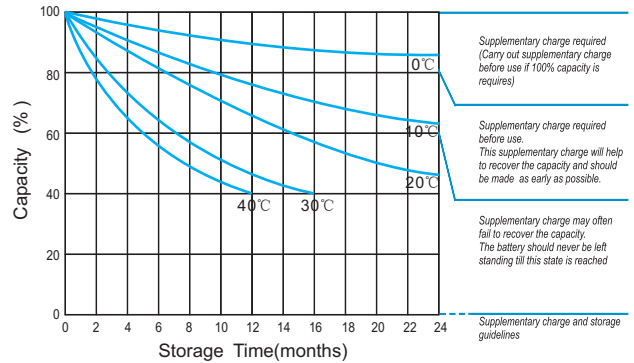

Effect of Temperature on Long Term Life

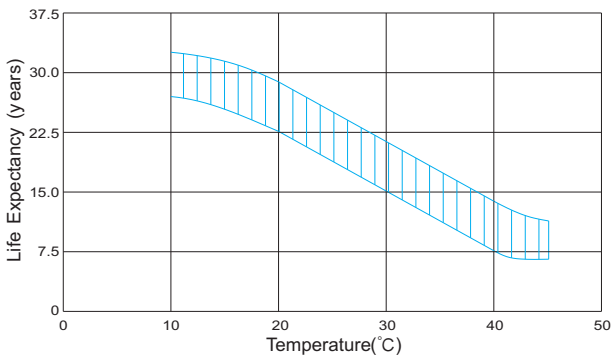

Relationship of OCV And State of Charge(20°C)

